

# NICER CALIBRATION: Release Notes of xti20221001

C. B. Markwardt, J. Steiner

Version 1.0 2022-10-25 - initial version

## Introduction

This document describes developments and performance of NICER Calibration release xti20221001. This release contains improvements of:

- Energy scale solution “optmv13” (slow and fast channel)
- Background model auxiliary files for
  - SCORPEON
  - 3C50
  - Space Weather
  - Diagonal response matrix for non-X-ray background
- Systematic error vector
- Global known bad times

## Summary

This file documents NICER calibration products released as CALDB xti20221001. Summary of results:

- Crab residuals <2% in range 0.24 - 14 keV
- Revisions to energy scale (optmv13), which improves gain performance above 8 keV with negligible change below 8 keV
- Background model auxiliary files for the SCORPEON, 3C50 and Space Weather models
- Files that contain known bad times and an estimate of systematic error vector

Example residuals are shown in Figure 1.

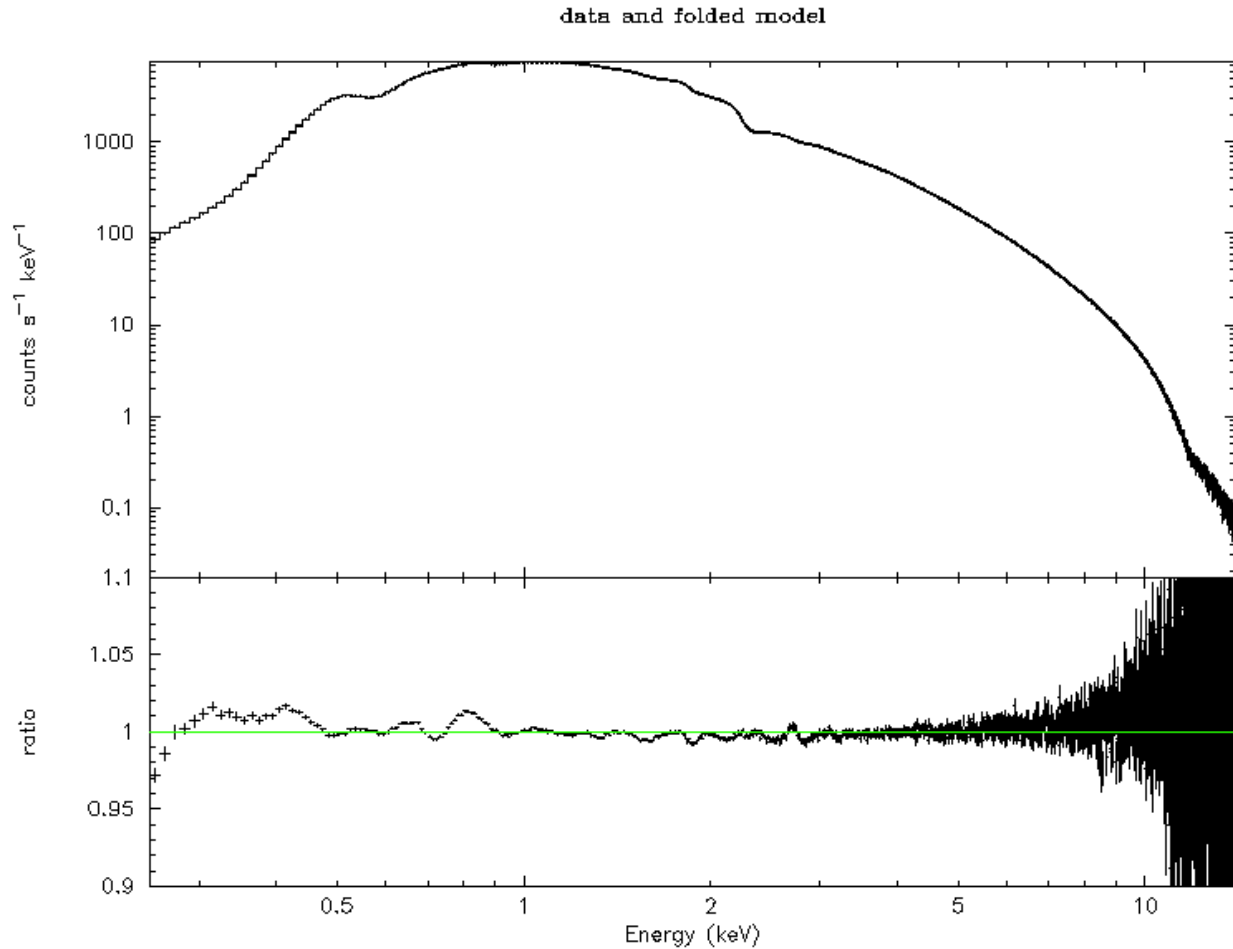


Figure 1. Example residuals after fitting the Crab Nebula using NICER calibration release xti20221001 (no change from previous release).

There are small systematic residuals across the board (<2%), but otherwise the fit is excellent.


## Domain of Applicability

The current fits to the Crab are in the energy range 0.24 - 14.0 keV. We expect that most spectral fits can be performed in that energy range with good success. Please note that with this release, performance for on-axis sources has not changed significantly. The major improvement is for off-axis targets, and for sources with high optical loading.

**Systematic errors.** Relative systematic errors can be expected to be **less than 1.5% in the 0.4 - 10 keV range**. The current recommended systematic error vector is shown in Figure 1. This file is in CALDB and can be applied to any spectrum using the niphasserr task, which is

automatically done by `nicerl3-spect.` command. Although this does not quite capture the energy-dependent systematics, it will be a good rule of thumb for most observations.

Below 0.4 keV there are several uncertainties that start to compete (gain scale, RMF parameters, intrinsic Crab spectrum including Carbon edge profile). Above 10 keV, expect systematic errors to be larger due to uncertainties in the optic throughput and detector efficiency.

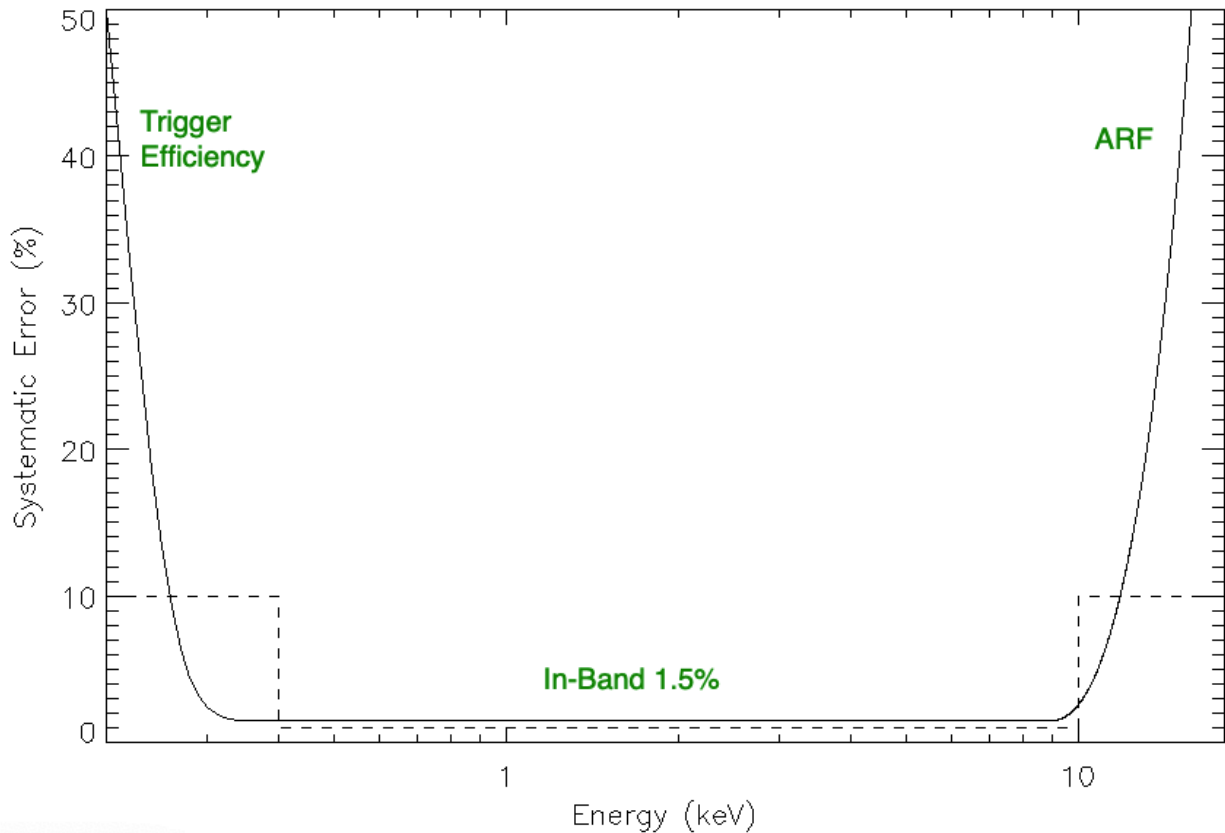

**Figure 1.** NICER recommended systematic errors. In the 0.3-10 keV range, the spectral systematic errors is within 1.5%. Outside of this band, the recommended systematic errors increase gradually. The previous recommendation is shown dashed.

**Off-Axis Performance.** We expect that for sources within 100 arcseconds of on-axis ( $ANG\_DIST < 0.0278$ ), performance should be comparable to on-axis results. We are aware that the current off-axis model has special deficiencies for energies above 8 keV and off-axis angles of  $>150$  arcsec. Response errors may be 100% or more. Users of the response calculators should be especially careful of off-axis targets that have high energy tails.

**Absolute flux scale.** The absolute NICER flux level is not pegged to another observatory or flux reference point. However in the process of fitting the Crab data, there is no doubt that NuSTAR's "absolute" flux calibration (Madsen et al. 2017) has guided the calibrator's hand. Note that in the work here, the Crab spectra have been corrected for instrumental deadtime

using the filter file's mean deadtime measurements. For the Crab, the included deadtime correction factor is about 8%.

**Flux dependence.** We are not aware of any flux dependence on the response matrix. Above  $\sim 2$  Crab pile-up becomes significant and will distort the spectrum in a complicated and non-linear fashion. At much fainter fluxes, background will be the dominant systematic flux error rather than the response components.

**Optical loading dependence. All of the results here are based on filtering to get low optical loading (near-dark conditions).** We selected array undershoots less than 50 ct/s for all Crab data (`underonly_range=0-50`). However, because of the new `optmv12` gain and response calculators in this release, we can now recommend calibrated results in the range of 0-500 undershoot ct/s.

Optical loading will broaden the energy response as well as modify the trigger efficiency parameters, and these effects are taken into account in the RMF calculator. Also a strong noise peak may intrude into the energy band of interest (0.25 - 0.45 keV range). For that reason, the user should select a smaller undershoot range (0-50 preferred) if possible.

**Point-like or off-axis nature of target.** The NICER response calculators in this release are capable of calculating the response to point-like as well as diffuse sources. The possible diffuse surface brightness profiles supported are: gaussian, uniform flat sky, and user-specified radial surface brightness profile.

## Areas Still to Improve

We know this release is not perfect. We believe that this release will be useful for many astronomers analyzing data from point sources. However, we will be making improvements in the future to enhance the applicability of the products to more cases. Here are some areas:

- Low energy response ( $< 1$  keV)

## Files Delivered

The following files are available

- Energy scale (gain) in CALDB
  - `gain/nixtflightpi20170601v008.fits` (“`optmv13`” energy scale slow channel)
  - `gainfast/nixtflightpifast20170601v002.fits` (“`optmv13`” fast channel)
- Parameter file used to estimate background

- detparam/nixtinoiseparam20170601v002.fits - per-module noise peak parameters
- rmf/nixtidiagresp20170601v001.rmf - diagonal response used by SCORPEON for non-X-ray background components
- SCORPEON Model parameters
  - bkgparam/nixtibkgparam20170601v001.fits
- 3C50 Model library files (one for each energy scale solution)
  - bkgparam/nixti3c50\_rgv5\_20170601v001.fits
  - bkgparam/nixti3c50\_g2019d\_20170601v001.fits
  - bkgparam/nixti3c50\_g2020a\_20170601v001.fits
  - bkgparam/nixti3c50\_g2020b\_20170601v001.fits
  - bkgparam/nixti3c50\_g2021\_20170601v001.fits
- Space Weather event list
  - bkgparam/nixtispaceweather20170601v001.evt
- Quality-flagging files
  - syserr/nixtisyserr20170601v001.fits - systematic error vector
  - nixtibadtimes20170601v001.fits - known detector bad times

## Practical Usage

### Recalibrating Energy Scale

For practical usage, users are expected to both re-calibrate the energy scale of their data, and then use both RMF and ARF together. An analyst must use all three components ( energy scale, RMF, ARF) to gain the benefit of calibration improvements. Not using all three may lead to worse, and possibly catastrophically worse, results.

The easiest way to re-calibrate the energy scale is to re-run nicerl2 on each observation data set, and then re-select data based on the preferred filtering criteria.

```
nicerl2 indir ...
```

The above command tells nicerl2 to perform its standard processing but use the new energy scale calibration file for the PI column. The "..." indicates that you can use any of your own custom filtering criteria. There should be no need to manually specify the picalfile parameter if one is using an updated version of CALDB.

You can also take an existing NICER cleaned event file and "recalibrate" it without re-doing all of the other NICER processing steps.

```
nicerpi infile_cl.evt hkfile=NONE calfile=CALDB outfile=outfile_cl.evt column=PI recal=YES
```

The above command will apply the new calibration to the existing event file `infile_cl.evt`, and write the result in `outfile_cl.evt`. However, you need to beware of one important issue. If your `infile_cl.evt` file has been screened in energy, then the bottom-most 1-2 bins of `outfile.evt` will be incorrect. If you need these bins for science, the only way to recover these bins is to re-run `nicerl2` as described above. However, if you performed a more generous selection during the cleaning phase, you can simply "ignore" them within XSPEC.

## Using the ARF and RMF

NICER now supports computing a per-observation ARF and RMF response file using the `'nicerarf'` and `'nicerrmf'` task. These responses will be tuned to the conditions of your specific observation and spectral extraction. Please see software documentation on the NICER website for more information about how to use these response calculator tasks.

The ARF and RMF files can be used directly within XSPEC with no modifications, assuming you understand the caveats above. A standard cleaned event file has 1501 bins, corresponding to 0-15 keV. The RMF files provided also have 1501 bins.

The ARF and RMF are matched together. Do not try to use the new ARF with mismatched RMF or vice versa. This is because the photon energy spacing has changed with the new responses, and both energy grids have to match.

The RMFs have the low energy trigger efficiency curve applied (low energy threshold curve). Going below about 0.4 keV, the trigger becomes less and less efficient, and that efficiency curve has a known shape. Because the trigger efficiency has been applied, you should be able to perform spectral fitting down to about 0.25 keV (assuming your data were taken in optically dark conditions - undershoots less than 50 ct/s). If you include data with brighter optical conditions, limit your fits to 0.4-10 keV.

## What to Do If You Selected Fewer Than 52 Modules?


Using the NICERDAS software released with HEASoft 6.29, the number of modules enabled/disabled or selected/deselected is handled automatically. The software uses a portion of the event file called the "FPM Selection" information which contains detector exposure information on a per-detector basis. This information is used by `'nicerarf'` and `'nicerrmf'` to compute accurate responses.

Please see the following web page for more information about how to retrieve and use per-module responses.

[https://heasarc.gsfc.nasa.gov/docs/nicer/analysis\\_threads/arf-rmf/](https://heasarc.gsfc.nasa.gov/docs/nicer/analysis_threads/arf-rmf/)

# Performance

Figure 2 shows the array-total performance of the model described below for the Crab nebula+pulsar.

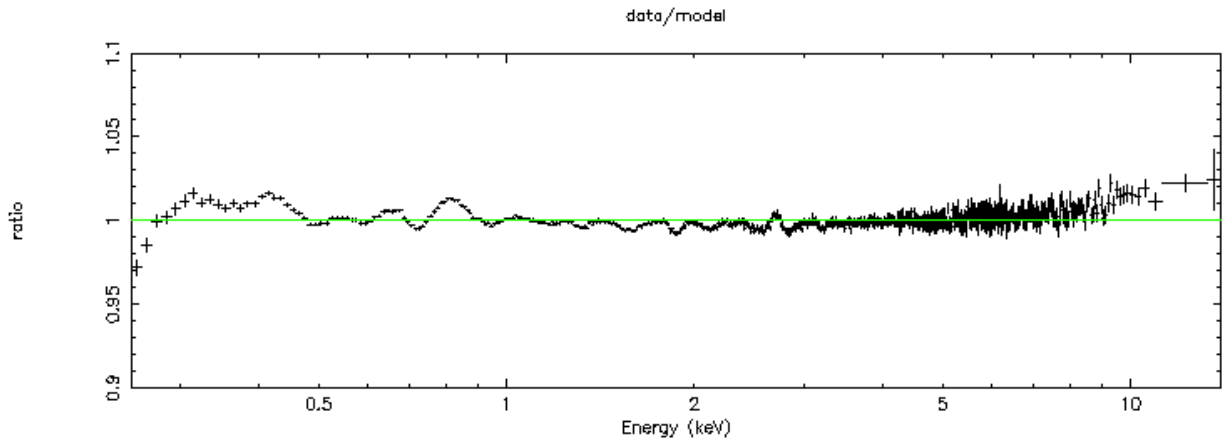

**Figure 2.** Residuals after using calibration release xti20221001 with the Crab Nebula (no change since previous release)

The data are from observations 10130101ss where ss ranges from 01-32. Only optically dark (undercounts < 50ct/s) and low background conditions were chosen, using the standard low background criteria of nimaketime.

The following features are notable

- The energy range extends from 0.24 keV to 15 keV in this residual plot
- Residuals are <1.5% in the 0.4-10 keV range described above in the Domain of Applicability
  - Residuals are larger below 0.4 keV, but still within the specified 10% uncertainty limits
  - Above 10 keV, residuals are still within the 10% limits established above
- No strong gold or silicon features are visible
- The remaining features below 6 keV are systematics dominated, which justifies adding a systematic error of ~1% to all (bright) target spectra
- Parameters appear to be within "sane" ranges

## Crab Reference Model

One big change from previous releases is that the astrophysical model of the Crab nebula + pulsar has become more sophisticated. The two big areas of improvement are

- inclusion of the as-measured absorption edge fine structure for Oxygen, Neon, and Iron (Kaastra et al. 2009)
- inclusion of a dust-scattering term (Smith Valencic & Corrales 2016)

The absorption model is basically the model of `tbvarabs` (Wilms et al 2000) as found in XSPEC. However, we have taken the edge fine structure as measured by Kaastra et al. 2009 using XMM gratings and embedded it into a new XSPEC model called **`tbvarkrabs`**. This external XSPEC model is distributed with the calibration products and you can use it to verify its performance.

**This model is only meant for use with the Crab. Do not use `tbvarkrabs` with other targets!**

The dust scattering model is based upon Smith Valencic & Corrales (2016), which is embodied within the 'xscat' model of XSPEC. The `xscatm` model has recently been extended to be applicable to the NICER aperture size of 200 arcmin in radius, courtesy of Randall Smith.. `xscatm` **can be used for all NICER bright sources**. Set the aperture size to 200' to replicate the results shown here.

## Summary of Model

The XSPEC model used here is embodied within `crab/model.xcm`. Here are the major terms of the model:

```
model TBvarkrabs*xscatm(curv*powerlaw + crab_pulsar)
```

- `tbvarkrabs` is the Crab-adjusted version of the `tb(var)abs` model most commonly used for XSPEC ISM absorption work
- `xscatm` is the dust scattering model of Smith et al. (2016), extended to larger aperture sizes
- `powerlaw` is the main power law continuum emission of the Crab, as modified by "curv"
- `curv` is an `mdefine`'d model representing curvature of the nebula in the <10 keV range as described by Kaastra et al. (2009)
- `crab_pulsar` is an `mdefine`'d model representing the spectrum of the pulsar itself, as described by Kaastra et al. (2009)

The `curv` model represents that the nebula has a spatially-dependent spectral shape. Kaastra et al. (2009) develop an empirical model of the Mori et al. (2004) Chandra Crab observations. The `crab_pulsar` model is an empirical formula presented by Kaastra et al. (2009), based on data from Kuiper et al. (2001). Both of these models have adjustable parameters, but they are kept fixed at the values established by Kaastra et al. (2009).



Note that Kaastra et al. (2009) present XMM-Newton grating observations in the 7-30A (0.4-1.77 keV) range. Their observations are most powerful to establish the absorption by the ISM, especially the fine structure around the Oxygen (0.533 keV), Iron (0.71 keV), and Neon (0.87 keV). They will be less powerful to establish broad-band spectral values like NH or power-law index. We have kept these broad parameters free to vary during spectral fits of NICER data. Abundances of individual elements, including Oxygen, Neon, and Iron, were allowed to vary and appear to be roughly consistent with Kaastra's work.

Below 0.4 keV there may be more uncertainties than above that energy. The Kaastra et al. (2009) work limits their fit to 0.411 keV and higher in energy, except for examining the column density at the Nitrogen edge at 0.4 keV. We have little information about the fine structure profile of the ISM near the Carbon edge near 0.285 keV. Also, the trigger efficiency curve and off-diagonal "shelf" response terms are surely correlated below 0.35 keV, and we are unlikely to have gotten a perfect match to all data. For that reason, we expect systematic errors to be larger (~5%) below 0.4 keV.

Above 10 keV, we have assumed the power law index 2.105 continues to higher energies without turning over. We have adjusted the total instrumental throughput above 10 keV to satisfy this assumption. However, the assumption may not be perfectly correct, and the >10 keV response is quite likely to have a more complicated behavior than a simple multiplicative correction. Thus, we expect systematic errors to be in the 10% range above 10 keV. For most observations that are background-dominated above 10 keV, these considerations won't matter in any case.

## Changes and Improvements

### Energy Scale (Gain)

This release contains the "optmv13" gain revision. The primary driver of this release is to improve performance at higher energies, above 8 keV. Compared to the previous release, the new release more accurately recovers high energy fluorescent lines seen from gold and nickel during SAA passages. Both the slow and fast channel energy scale solutions were updated. Please see the "Energy Scale Developments and Releases (optmv13)" document for more details. A summary of the changes is shown in Figure 13.

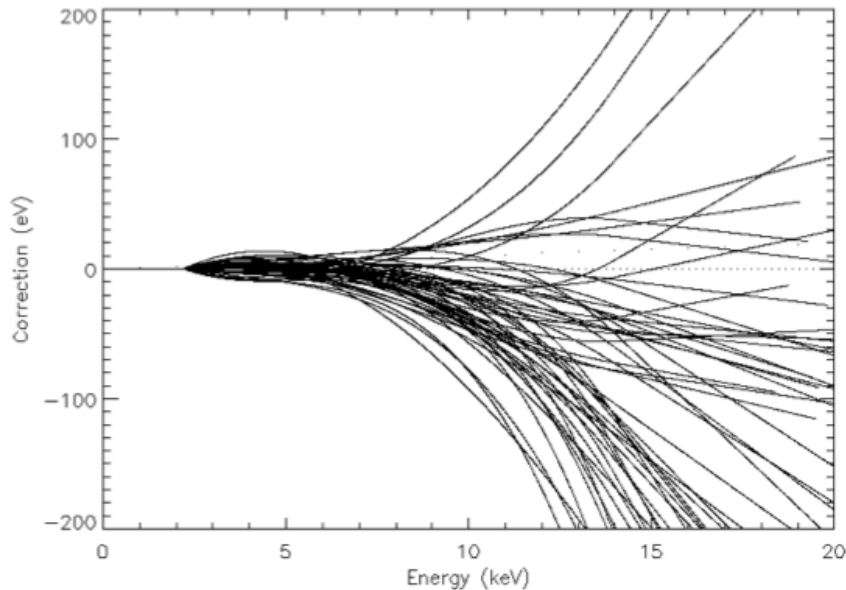


Figure 3. Change to slow channel energy scale due to new optmv13 solution.

#### Slow Channel Energy Scale Change

- Change: improve slow channel energy scale above 8 keV to more closely match high energy lines
- Effects: below 6 keV, changes are negligible (< 2 eV on an array-averaged basis). Above 10 keV, array averaged changes can approach a few hundred eV.

#### Fast Channel Energy Scale Change

- Change: update fast channel energy scale globally to more closely match slow channel
- Effects: fast channel not typically used for science, but it is used for PI\_RATIO event screening; approx ~5% more “good” events included in spectra above 10 keV

## Background Model Parameter Files and Quality Flagging

This release contains background model parameter files for three background models: SCORPEON, 3C50 and Space Weather. The latter two models were previously offered as separate software and data downloads, and are now included within NICER’s NICERDAS and CALDB offerings. Please see the “Background Model Parameter Files” CALDB document for more information.

In addition, NICER now includes quality-flagging information in CALDB. A systematic error vector is included which can be applied with the task niphasyerr (see the “Spectral Systematic

Error” document for more information). Also, a list of known “bad times” is included as a FITS table (see “Global Bad Times” for more information)

- Change: addition of background model auxiliary files and quality flagging information
- Effect: more effective and streamlined access to background estimates and data quality indicators

## **Detector Parameters (Noise Peak Parameters)**

This release contains a new noise peak parameter file. In this revision of the file, the domain of applicability for the parameters was extended from 0-500 ct/s/FPM to 0-1000 ct/s/FPM. The NOISE\_ECENT\_TREND column was added to the file to account for long-term trends in the noise rate, and a second polynomial (i.e. linear) term was added to NOISE\_FANO\_EFF. This file was not previously used by any software.

- Change: improve domain of applicability of noise peak parameter file
- Effects: no change, since NICER software did not previously use this file